

Audio, Control & Instrumentation Cable

2 to 12pr, 18AWG Unscreened – PVC Sheath




CI 119, CI 120, CI 121, CI 122, CI 123, CI 124, CI 125, CI 126, CI 127, CI 128

Applications

Unscreened paired cables suitable for Security and Alarm systems, Audio, Control and Instrumentation

Cross Section Drawing

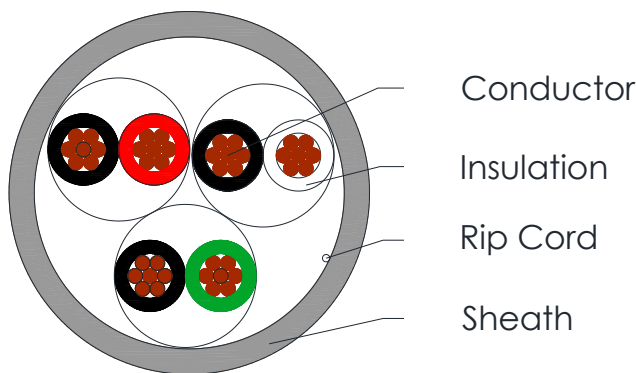

Design

Unit	Properties
Conductor	Bare Copper wires
Insulation	Polyolefin Pair 1: Black/Red Pair 2: Black/White Pair 3: Black/Green Pair 4: Black/Blue Pair 5: Black/Yellow Pair 6: Black/Brown Pair 7: Black/Orange Pair 8: Black/Purple Pair 9: Black/Grey Pair 10: Black/Pink Pair 11: Black/Tan Pair 12: Black/Turquoise
Pair	two twisted wires
Cable Core	N pairs stranded
Rip Core	Nylon Yarn
Sheath Material	Flame-Retardant Polyvinyl Chloride (PVC) Standard colour: Grey
Standard Put Up Length	305 meters

*Other Colors, Put Up Lengths and structures can be manufactured upon request, please contact your local B3 International sales representative.

Audio, Control & Instrumentation Cable

2 to 12pr, 18AWG Unscreened – PVC Sheath



C1119, C1120, C1121, C1122, C1123, C1124, C1125, C1126, C1127, C1128

Physical Characteristics

Part Number	C1119	C1120	C1121	C1122	C1123	C1124	C1125	C1126	C1127	C1128
No. of Pairs	2	3	4	5	6	7	8	9	10	12
Nom. Diameter Conductor (AWG)	18 (7 x26)									
Nom. Radial Thickness Insulation (mm)	0.20									
Nom. Radial Thickness Sheath (mm)	0.4	0.4	0.5	0.5	0.6	0.6	0.8	0.8	0.8	0.8
Nom. Overall Diameter (mm)	6.0	7.4	8.0	8.3	8.8	9.4	10.2	10.9	11.4	12.3
Operating Temperature (°C)	-25°C to +75°C									
Max. Recommended Pulling Tension (N)	400	575	735	995	1154	1387	1594	1810	2015	2375
Min. Bend Radius (install) (mm)	60	74	80	83	88	94	102	109	114	123
Nominal Cable Weight (kg/km)	45.8	64.0	81.9	103.4	128.0	145.6	171.2	192.2	214.3	250.0

Electrical Characteristics

Part Number	C1119	C1120	C1121	C1122	C1123	C1124	C1125	C1126	C1127	C1128
No. of Pairs	2	3	4	5	6	7	8	9	10	12
Max. Conductor Resistance (Ohm/km)	22.7									
Capacitance cond to cond (pF/m)	48									
Max. Current at 25°C (Amps)	4	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5
Operating Voltage (Vrms)	300									

Reference Standards

(BS) EN 50290-2
IEC 60228
IEC 60332-1
RoHS directives