

1u Empty Snap-In Panel 24port for Cat6a UTP KJ




PP-1 | 42-24

Applications

1u 24port Empty Snap-In Panel for B3 Internationals Cat6a UTP Keystone Jacks.

Product Picture

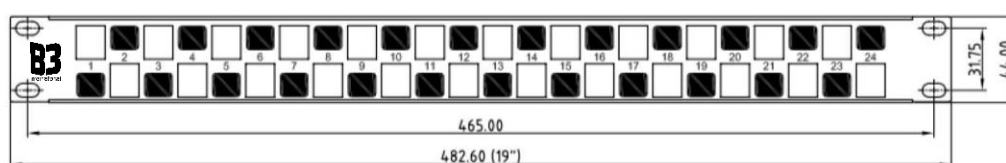

Environmental Conditions

Relative Humidity (Operational)	Temperature	
	Storage	Operational
Maximum Non Condensing 93%	-40 to +70°C	-10 to +60°C

Electrical Characteristics

Material
High Impact Flame Retardant Plastic and 1.5mm CRS

Reference Standards

UL94V-0
UL1863
RoHS directives