

# Audio Control & Instrumentation Cable, 2C to 8C, 20AWG Overall Screen, Plenum Grade PVC Sheath




C8731, C8733, C8735, C8737, C8739

## Applications

Screened Multi-Conductor cables suitable for Audio, Control, Instrumentation and Building Management Systems (BMS)

## Cross Section Drawing

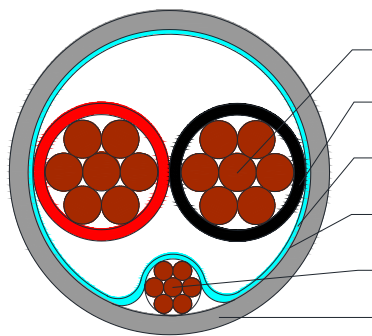

- Conductor
- Insulation
- Al/PET Tape
- Rip Cord
- Drain Wire
- Sheath



## Design

Unit	Properties
Conductor	N x Bare Copper wire, 20AWG flexible
Insulation	PVC Core 1: Black Core 2: Red Core 3: White Core 4: Green Core 5: Brown Core 6: Blue Core 7: Orange Core 8: Yellow
Drain Wire	24 AWG (7 x 32) Tinned Copper
Screen	Aluminium/Polyester 100% Coverage
Rip Cord	Nylon Yarn
Sheath Material	Plenum Grade Flame-Retardant Polyvinyl Chloride (PVC) Standard Colour: Grey
Standard Put Up Length	305 meters

\*Other Colors, Put Up Lengths and structures can be manufactured upon request, please contact your local B3 International sales representative.

**Audio Control & Instrumentation Cable,  
2C to 8C, 20AWG Overall Screen,  
Plenum Grade PVC Sheath**



**C8731, C8733, C8735, C8737, C8739**

**Physical Characteristics**

Part Number	C8731	C8733	C8735	C8737	C8739
No of cores x 20AWG (7 x 28)	2	3	4	6	8
Nom. Diameter Conductor (mm)	0.93				
Nom. Radial Thickness Insulation (mm)	0.30				
Nom. Radial Thickness Sheath(mm)	0.45	0.65	0.65	0.65	0.65
Nom. Overall Diameter (mm)	4.1	4.7	5.1	6.0	6.4
Operating Temperature (°C)	0 / +60				
Max. Recommended Pulling Tension (N)	112	168	224	336	448
Min. Bend Radius (install) (mm)	41	47	51	60	64
Nominal Cable Weight (kg/km)	23.4	35.1	42.7	58.3	72.6

**Electrical Characteristics**

Part Number	C8731	C8733	C8735	C8737	C8739
No of cores x 20AWG (7 x 28)	2	3	4	6	8
Max. DC Resistance Conductor (Ω/km)	35.75				
Max. DC Resistance Screen (Ω/km)	78.5				
Capacitance conductor to conductor (pF/m)	145	142	132	129	127
Capacitance conductor to the rest(pF/m)	261	256	238	233	228
Nominal Inductance (μH/m)	0.5				
Max. Recom. Current @ 25°C (Amps)	3.75	3.75	3	2.6	2.6
Max. Operating Voltage (Vrms)	300				

**Reference Standards**

(BS) EN 50290-2
IEC 60228
NFC 725.154(A), ANSI/NFPA 262
RoHS directives