

Audio Control & Instrumentation Cable, 2C to 8C, 14AWG, Overall Screen & PVC Sheath




C1001, C1003, C1005, C1209, C1248, C1250

Applications

Screened Multi-Conductor cable suitable for Audio, Control, Instrumentation and Building Management Systems (BMS) . UL listed E486876.

Cross Section Drawing

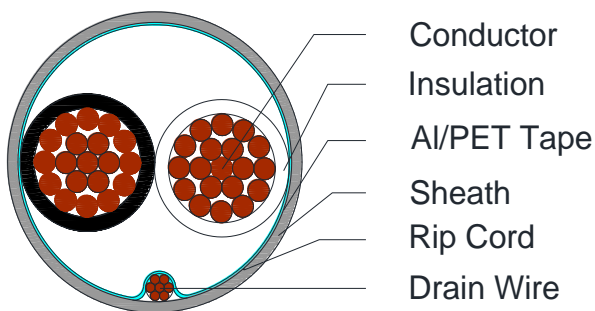

Design

Unit	Properties
Conductor	N x Bare Copper wire, 14AWG flexible
Insulation	Polyolefin Core 1: Black Core 2: White Core 3: Red Core 4: Green Core 5: Brown Core 6: Blue Core 7: Orange Core 8: Yellow
Drain wire	24 AWG (7 x 32) Tinned Copper
Screen	Aluminium/Polyester 100% Coverage
Rip cord	Nylon yarn
Sheath	Flame-Retardant Polyvinyl Chloride (PVC) Standard colour: Grey
Standard Put Up Length	305 meters

*Other Colors, Put Up Lengths and structures can be manufactured upon request, please contact your local B3 International sales representative.

Audio Control & Instrumentation Cable, 2C to 8C, 14AWG, Overall Screen & PVC Sheath



C1001, C1003, C1005, C1209, C1248, C1250

Physical Characteristics

Part Number	C1001	C1003	C1005	C1209	C1248	C1250
No of cores x 14AWG (19X27)	2	3	4	5	6	8
Nom. Diameter Conductor(mm)	1.8					
Nom. Radial Thickness Insulation(mm)	0.3					
Nom. Radial Thickness Sheath(mm)	0.4					
Nom. Overall Diameter(mm)	6.0	6.5	6.9	7.8	8.6	9.8
Operating Temperature (°C)	-25 to +75					
Max. Recommended Pulling Tension (N)	420	635	845	1055	1265	1685
Min. Bend Radius (install)(mm)	60	65	70	78	86	98
Nominal Cable Weight (kg/km)	57	79.9	102.5	127	151	197.3

Electrical Characteristics at 20°C

Part Number	C1001	C1003	C1005	C1209	C1248	C1250
No of cores x 14AWG (19X27)	2	3	4	5	6	8
Max. DC Resistance Conductor (Ω/km)	9.36					
Max. DC Resistance Screen (Ω/km)	78.5					
Capacitance conductor to conductor (pF/m)	105	100	98	97	96	95
Capacitance cond. To other cond.+screen (pF/m)	190	190	178	176	175	170
Nominal Inductance (μH/m)	0.5					
Max. Recommended Current at 25°C (Amps)	8	8	6.4	6.4	5.6	5.6
Max. Operating Voltage (Vrms)	300					

Reference Standards

(BS) EN 50290-2
IEC 60228
IEC 60332-1
RoHS directives