

Audio Control & Instrumentation Cable, 2C to 12C, 16AWG, Unscreened & PVC Sheath




C1008, C1010, C1012, C1253, C1255, C1638, C1698, C4410

Applications

Unscreened Multi-Conductor cable suitable for Audio, Control, Instrumentation and Building Management Systems (BMS) . UL listed E486876.

Cross Section Drawing

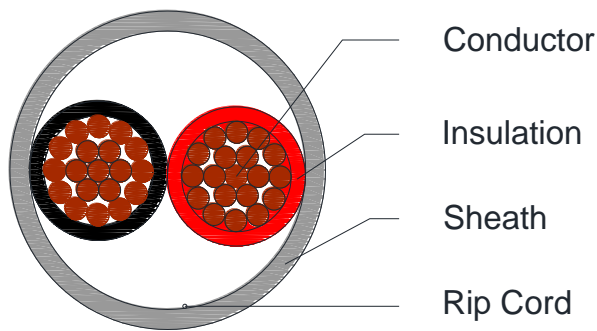

Design

Unit	Properties
Conductor	N x Bare Copper wire, 16AWG flexible
Insulation	Polyolefin Core 1: Black Core 2: Red Core 3: White Core 4: Green Core 5: Brown Core 6: Blue Core 7: Orange Core 8: Yellow Core 9: Purple Core 10: Grey Core 11: Pink Core 12: Tan
Rip cord	Nylon yarn
Sheath	Flame-Retardant Polyvinyl Chloride (PVC) Standard colour: Grey
Standard Put Up Length	305 meters

*Other Colors, Put Up Lengths and structures can be manufactured upon request, please contact your local B3 International sales representative.

Audio Control & Instrumentation Cable, 2C to 12C, 16AWG, Unscreened & PVC Sheath



C1008, C1010, C1012, C1253, C1255, C1638, C1698, C4410

Physical Characteristics

Part Number	C1008	C1010	C1012	C1253	C1698	C1255	C1638	C4410
No of cores x 16AWG (19 x 29)	2	3	4	6	7	8	10	12
Nom. Diameter Conductor(mm)	1.4							
Nom. Radial Thickness Insulation(mm)	0.2							
Nom. Radial Thickness Sheath(mm)	0.4	0.4	0.4	0.4	0.4	0.4	0.5	0.5
Nom. Overall Diameter(mm)	4.5	4.75	5.25	6.7	6.9	7.5	8.4	8.7
Operating Temperature (°C)	-25 to +75							
Max. Recommended Pulling Tension (N)	262	391	520	780	947	1040	1300	1560
Min. Bend Radius (install)(mm)	46	49	53	68	69	76	84	87
Nominal Cable Weight (kg/km)	35	7.7	61.1	89	109	118.1	135.5	161.6

Electrical Characteristics at 20°C

Part Number	C1008	C1010	C1012	C1253	C1698	C1255	C1638	C4410
No of cores x 16AWG (19 x 29)	2	3	4	6	7	8	10	12
Max. DC Resistance Conductor (Ω /km)	15.47							
Capacitance conductor to conductor (pF/m)	53	56	55	48	47	45	45	45
Nominal Inductance (μ H/m)	0.5							
Max. Recommended Current at 25°C (Amps)	6.25	6.25	5.00	4.35	4.35	4.35	4.35	4.35
Max. Operating Voltage (Vrms)	300							

Reference Standards

(BS) EN 50290-2
IEC 60228
IEC 60332-1
UL 1581
RoHS directives