

Category 6 Data Cables

24AWG. UTP with PVC or HFFR Sheath




C1059, C1060

Applications

Twisted pair cable suitable for Local Area Networks and Video Applications

Cross Section Drawing

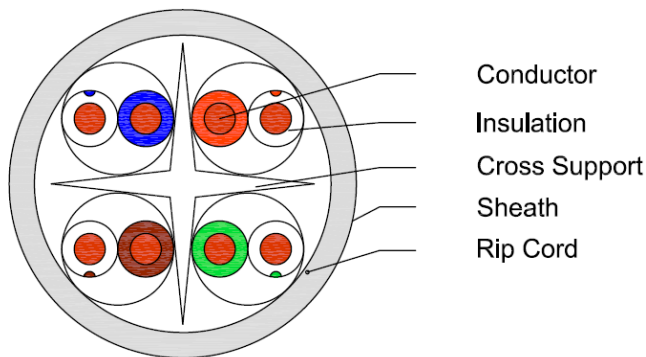

Design

Unit	Properties
Conductor	Solid Plain Copper Wire
Insulation	Solid Polyethylene Pair 1: WHITE/Blue + BLUE Pair 2: WHITE/Orange + ORANGE Pair 3: WHITE/Green + GREEN Pair 4: WHITE/Brown + BROWN
Pair	Two wires twisted together
Filler	Cross support
Rip Cord	Nylon Yarn
Sheath Material	Polyvinyl Chloride (PVC) or Halogen Free, Flame Retardant (HFFR) Standard Color: Turquoise
Standard Put Up Length	305 metres

*Other Colors, Put Up Lengths and structures can be manufactured upon request, please contact your local B3 International sales representative.

Category 6 Data Cables

24AWG. UTP with PVC or HFFR Sheath



C1059, C1060

Physical Characteristics

Part Number	C1059	C1060
Sheath Material	PVC	HFFR
Screen type	UTP	UTP
No. of Pairs	4	
Conductor Size (AWG)	24	
Nom. Radial Thickness Sheath (mm)	0.5	
Nom. Overall Diameter (mm)	5.9	
Operating Temperature (°C)	-20°C to +60°C	
Min. Bend Radius (install) (mm)	61	
Nominal Cable Weight (kg/km)	37.2	
Maximum Pulling Tension (Newton)	160	

Electrical Characteristics at 20°C

Conductor Resistance (Ohm/100m)	Mutual Capacitance (pF/m)	Input Impedance (Ohm)	Velocity of Propagation (%)	Maximum Delay Skew (ns/100m)	Max. Operating Voltage (Volts RMS)
9.38	56	100 ± 15	67	45	300

Frequency (MHz)	Return Loss (dB/100m)	Maximum Attenuation (dB/100m)	Minimum NEXT (dB)	Maximum Time Delay (ns/100m)	Minimum PSNEXT (dB)	Minimum ELFEXT (dB)	Minimum PSELFEXT (dB)
1	20.0	2.0	74.3	570.00	72.3	67.8	64.8
4	23.0	3.8	65.3	552.00	63.3	55.8	52.8
8	24.5	5.3	60.8	546.73	58.8	49.7	46.7
10	25.0	6.0	59.3	545.38	57.3	47.8	44.8
16	25.0	7.6	56.2	543.00	54.2	43.7	40.7
20	25.0	8.5	54.8	542.05	52.8	41.8	38.8
25	24.3	9.5	53.3	541.20	51.3	39.8	36.8
31.25	23.6	10.7	51.9	540.44	49.9	37.9	34.9
62.5	21.5	15.4	47.4	538.55	45.4	31.9	28.9
100	20.1	19.8	44.3	537.80	42.3	27.8	24.8
200	18.0	29.0	39.8	536.54	37.8	21.8	18.8
250	17.3	32.8	38.3	536.27	36.3	19.8	16.8

Category 6 Data Cables

24AWG. UTP with PVC or HFFR Sheath



C1059, C1060

Reference Standards

ISO 11801
ANSI/TIA/EIA-568-C2
IEC 60332-1
IEC 61034 (HFFR only)
IEC 60754-1 & 2 (HFFR only)
RoHS directives